

****CLEARANCE** Steel Security Personnel Pedestrian Door - Industrial Grade
Exterior Outdoor Security Door for Garage, Warehouse, Shed, Industrial Unit,
Lockup, Shed, Shipping Container, Farm Barn**

~~£357.00~~ **£148.99**



End of Line / Discontinued model or Cosmetic Damage- Clearance Stock

Looking for ungraded Ultra High Security / heavy Duty Steel doors with 9 Point / Multi point Locking?

THIS IS **WHOLESALE**

**STEEL SECURITY
PERSONNEL
PEDESTRIAN
DOOR**





5 COLOURS & 3 SIZES UK STOCK AVAILABLE

- RAL 9003 WHITE
- RAL 7016 ANTHRACITE GREY
- RAL 9005 JET BLACK
- RAL 6007 JUNIPER GREEN
- RAL 5005 SIGNAL BLUE

Powder coated both in & out.

-840mm W x 2035mm H

-940mm W x 2035mm H

-1040mm W x 2035mm H


SPECIFICATION SHEET

Door Frame Material	1.5mm Galvanised Steel
Door Frame Thickness	90mm
Door Leaf Material	Double skinned 0.7mm galvanised steel
Door Leaf Thickness	45mm
Clear Opening Size	1995mm H x 750mm/850mm/950mm W
U Value	1.6w/m ² k (50mm Mineral Wool Insulation)
Acoustic Value	32dBa
Hinges	4 Stainless steel hinges
Weather Seal	Full weather seal to all 4 sides of the frame
Hole Cut Out Size	2035mm H x 840/940/1040mm W





4 x heavy duty hinges that offer extra security

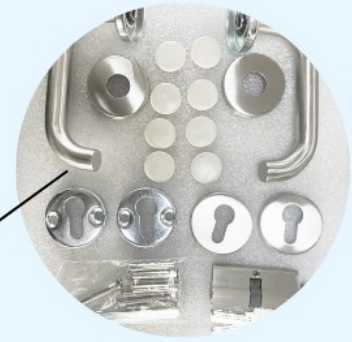

Full set of stainless steel handle & lock



3 sets of keys, single point locking mechanism



Full weather seal to all 4 sides of the frame

INSTRUCTIONS

Steel Personnel Pedestrian Door to fit 840mm x 2035mm opening

THIS IS WHOLESALE .CO.UK


4pm CUT OFF TIME.
NEXT DAY DELIVERY.
10% TRADE DISCOUNT

1




Fit door in the hole hinged in the correct orientation (NOTE door is universal, so can be fitted hinged on the left or right, just rotate 180° to so hinged on the opposite side).

2



Once door is square & firmly in position, using the pre-drilled tabs, mark fixing positions on the building lining/frame & drill using suitable drill bit.


3



Use anchor bolts or suitable frame fixings to secure in place (washers are advised). NOTE - due to various types of frame being installed into i.e. brick, metal, timber, we are unable to supply the door with fixings.


Optional: if ordered the extra add on vanity trim top cover any caps/rods, this can be fitted on the opposite side & secured with suitable adhesive /mastic.

4




The lock mechanism latch can now be rotated to suit your configuration i.e. hinged left side or hinged right side using a screwdriver as shown.

5



Insert the lock mechanism cassette into the door & secure with the 2 x M5 screws as shown.

6



The lock barrel is fitted with with thumb turn from the inside / key insert to the outside. Handle & cover plate secured with screws as shown.

THIS IS WHOLESALE .CO.UK

**UNIVERSALLY
HINGED LEFT OR
RIGHT**

Simply rotate the door 180° to hinge on the opposite side. Hinged side you can select at the point of installation depending on the orientation of the install.

BOTH IN & OUT POWDER COATING IN 5 DIFFERENT COLOURS

RAL 7016 Grey



RAL 9003 White



RAL 9005 Black



RAL 6007 Green



RAL 5005 Blue





OPTIONAL WINDOW/LOUVRE VENT

UNIVERSALLY HINGED LEFT OR RIGHT. SIMPLY LOCATE THE DOOR YOU TO HINGE ON THE OPPOSITE SIDE. SIMPLY SELECT OPEN IN OUR OUT. HINGED SIDE YOU CAN SELECT AT THE POINT OF INSTALLATION DEPENDING ON THE ORIENTATION OF THE INSTALL.

Can I use these doors as a fire exit? Our lockable external doors & lock sets are key lockable from the outside & thumb-turn release from the inside and thus a widely acceptable method of escape being defined as easily and immediately opened by any person in an emergency situation. Some people assume that only doors with panic hardware/handles are acceptable - hence its advisable to check with your local building control officer BEFORE purchasing if you need clarification. Note - a fire exit door must open in the direction of passage/travel and thus in most cases open OUTWARDS.

Steel security door for interior or exterior use - industrial personnel door is heavy duty door for Garage, Warehouse, Industrial Unit, Shopping Centre, Farm Barn - can be painted any colour your choice with outer frame, & optional stainless steel door handle with internal thumb turn & single point lock. OPTIONAL POWERS OF LOCKING COLOURS (AT EXTRA COST)

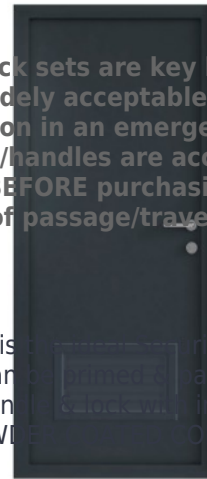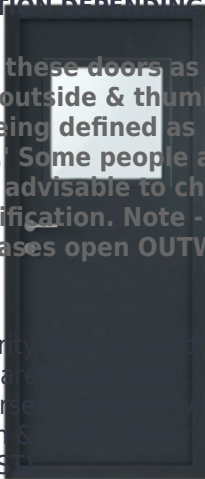

- RAL 9003 WHITE (painted both sides in/out)

- RAL 9005 JET BLACK (painted both sides in/out)

- RAL 6007 JUNIPER GREEN (painted both sides in/out)

- RAL 5005 SIGNAL BLUE (painted both sides in/out)

- RAL 9003 WHITE (painted both sides in/out)

- RAL 9005 JET BLACK (painted both sides in/out)

PLEASE NOTE - THIS IS ONE STANDARD SIZED 2035mm h x 840mm / 940mm / 1040mm wide - WE WHOLESALE STANDARD DOORS AND DO NOT MAKE THEM TO ORDER/CUSTOM SIZE. ITEM IS

Square Vision Panel Window Louvre Vent / Panel Window

Double glass 400*400mm

Double glass 220*1500mm

Louvre Vent

500*300mm

RECOMMENDED TO BE MEASURED, ORDERED AND INSTALLED BY A SUITABLE EXPERIENCED PROFESSIONAL AS WE DO NOT TAKE ANY LIABILITY FOR INCORRECT MEASUREMENTS. FULL TECHNICAL DRAWING WITH ALL DIMENSIONS IS BELOW & INSTALLATION INSTRUCTIONS.

Optional Add on 500mm x 300mm Louvre Vent or 400mm x 400mm / 220mm x 1500mm Vision Panels - SELF INSTALLATION / CUTTING REQUIRED (these are supplied with the door only for the customer to install) see instructions below for details. This add on is not pre-installed by ourselves and is only supplied with the door for the customer / installer to fit. Requires a competent and experienced installer, we accept no liability for mis-installation / mis-cutting or damage to product during installation. Frame powder coated both sides and will be sent the same colour as the door selected. Note, 150mm clearance must be left around all 4 sides of the door.

Weight: 840mm 46kg / 940mm 49kg / 1040mm 52kg

[DOWNLOAD PDF TECHNICAL DRAWING / DIMENSIONS](#)

[DOWNLOAD STEEL DOOR INSTALLATION INSTRUCTIONS / MANUAL](#)

[DOWNLOAD INSTRUCTIONS MANUAL FOR SIDE/HEADER EXPANSION INFIL PANELS](#)

[DOWNLOAD VISION GLASS PANEL / LOUVRE VENT INSTRUCTIONS](#)

[DOWNLOAD FIRE EXIT PUSH PAD/BAR + OUTSIDE ACCESS DEVICE INSTRUCTIONS](#)

[DOWNLOAD FIRE EXIT PUSH PAD/BAR + EXTERNAL BLANK INSTRUCTIONS](#)

[DOWNLOAD DOOR EXTERNAL BLANK / BLANKING PLATE INSTRUCTIONS](#)

[DOWNLOAD COMBINATION CODE HANDLE LOCK INSTALLATION INSTRUCTIONS](#)

[DOWNLOAD HIGH SECURITY MULTI-POINT LOCKING INC. PAS24 & FIRE RATED STEEL DOOR INSTALLATION INSTRUCTIONS](#)

[DOWNLOAD WC VACANT/ENGAGED CONVERSION KIT INSTALLATION INSTRUCTIONS](#)

[DOWNLOAD MAINTENANCE MANUAL](#)

840mm / 940mm / 1040mm x 2035mm outer dimensions ie. to fit 840mm x 2035mm cut out (clear opening 750mm/850mm/950mm) - door frame thickness 90mm / door leaf thickness 45mm. Actual Door Size: 1943mm H x 750mm/850mm/950mm W - comes pre-hung in frame and fixing points located around the frame for easy install with the correct screws/fixings (not supplied) into brick, timber, steel or other building material. We recommend adding 5-10mm to the external size about for fitting which can be filled with foam / silicone. We would recommend adding a rain drip to any inward opening doors being installed externally helping to prevent water ingress.

Exterior frame side comes with pre-fitted trim/lip to face the installation taking overall dimensions to 880mm / 980mm / 1080mm. If you want to recess the entire door including this frame section, you would need a sub frame internally in your aperture to suite 840 / 940 / 1040 x 2035mm for structural fixing.

Optional add on of an internal vanity trim surround measures 905mm/1005mm/1105mm x 2090mm. This is an aesthetic part to cover any gaps between the door frame and your structural opening, often saving the need for silicone/foam etc. This is optional from the list of add

WE STOCK ALL: CONFIGURATIONS OF DOOR OPENING INWARDS OR OUTWARDS, AS VIEWED FROM OUTSIDE- Doors are universal and can be fitted with hinges either on the left or the right hand as viewed from outside by rotating the pre-latch mechanism,- SEE IMAGE FOR FURTHER DETAILS ON CONFIGURATIONS WHEN SELECTING YOUR VARIATION OF DOOR AS INCORRECT ORDERS/RETURNS MUST BE RETURNED AT BUYERS COST. IF IN DOUBT PLEASE ASK.

Door Frame Material	<i>1.5mm Galvanised Steel</i>
Door Frame Thickness	<i>90mm</i>
Door Leaf Material	<i>Double skinned 0.7mm galvanised steel</i>
Door Leaf Thickness	<i>45mm</i>
Door Leaf Core	<i>Honeycomb core</i>
Actual Door Size	<i>1943mm x 750mm/850mm/950mm</i>
Hinges	<i>4 Stainless steel hinges</i>
Acoustic Value	<i>32dBa</i>

NOTE: due to manufacturing tolerances with regards to batch variation, we recommend ordering all coloured/powder coated doors for a project at the same time, from the same batch as we cannot be held responsible for any variation that occurs between batches.

Must be installed by a competent persons, we are not able to train, teach any DIY enthusiast how to fit a door correctly. Whilst its not a difficult job, each individuals competency and skill set varies and thus professional knowledge is advised to fit this product correctly, safely and securely for normal operation.

Note - door includes mechanical / moving parts such as lock mechanism, hinges, latches and as such requires regular maintenance and upkeep ion the form of regular lubrication/oil applying.