
[REGISTERED OFFICE ONLY]
The Levels
Capital Business Park
Cardiff
CF3 2PX
02920 099 098
sales@thisiswholesale.co.uk | https://www.thisiswholesale.co.uk/

10sqm Tile decoupling mat / anti-crack matting - uncoupling waterproof membrane rapid mat durable base roll for under tile 3.6mm

~~£117.60~~ **£79.21**

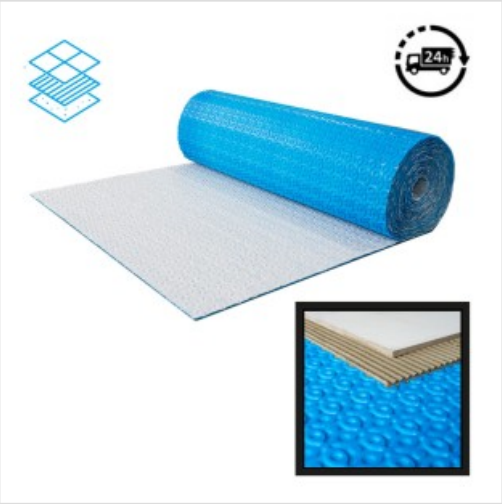

Product Description

The ultimate fail safe for tilers - Avoid movement and cracking of tiles / joints with tile decoupling membrane / waterproof matting - ideal for tiling over problematic floors such as heated screed or timber (OSB/plywood/tongue & groove) floors often subject to movement. The uncoupling membrane provides a supported & structurally separated layer between the substrate and the finished tiled surface

(occasionally subject to stock, larger orders may be made up of multiple rolls ie. if you order 30sqm it may be 2 x 15sqm rolls subject to stock, If this is an issue please check with us before ordering)

[PREVENT MOVEMENT UNCOUPLING OF TILES / CRACK SURPRESSION FROM MOVEMENT] Anti-crack matting suppresses any

movement and/or cracks in the substrate, in particular heated screeds and timber (OSB/plywood/floorboards) which are often subject to lateral movement's thus isolating the 2 layers allowing them to move independently thus preventing the transmission of lateral stresses to the floor often seen with cracks in tiles, grout or unbonding of the entire tile

[EVEN HEAT DISTRIBUTION] No more hot/cold spots with under floor heating, the 3.6mm membrane guarantees guarantees even heat even distributed by the membranes channels when used in combination with wet / electrical underfloor heating systems avoiding the need to raise the sub-floor

[WATERPROOFING IDEAL FOR WETROOMS, BATHROOMS & KITCHENS] Reliable waterproof matting made of polyethylene composite, protecting both the substrate / base from the infiltration of water (ie, timber floors) - no more stains and wet spots on ceilings from failed tiles, as well as further improving the durability

[VAPOUR CONTROL - FREE AIRLFLOW] Double layered membrane both top and bottom contains air channels for airfree circulation, thus allowing the surface to breath & allows moisture in the underlying layers to be released which wouldotherwise cause damage to the tile layer above, thus making the rapid mat suitable for damp environments and early stage concrete

[SUPPORT / LOAD DISTRIBUTION] Practically incompressible and thus able to support and distribute heavy loads while maintaining tile surface integrity

[EASY TO INSTALL & ENHANCED TILE ADHESION] 1m Wide rolls of 5m/30m making it easy to carry, store & transport, cuts with a simple utility knife / scissors and simply butt the edges of the matt together in rows without the need for extra joining tape, the uncoupling mats highly engineered design made up of a mortise and tenon embossed pattern creates and even and durable mechanical bond betweenceramics or tiles and the membrane

Download product instructions here

.

Composition: Two layers of non-woven polypropylene with an inner layer of glass filament - Can be laid either side up Size: 1m w x 5m/30m Rolls Sheet Thickness: 3.6mm Sheet Weight: approx. 650g/m (3.25kg.5m roll / 19.5kg/30m roll) Temperature Resistance: -20C to 90C N.B Tiling should not be carried below 5C Shelf Life: 48 months under normal dry conditions. Protect from frost, damp and sunlight