

Steel Security Personnel Door - CLEARANCE DAMAGED SECONDS - Industrial Grade Exterior Outdoor Security Door for Garage, Warehouse, Shed, Industrial Unit, Lockup, Shed, Shipping Container, Farm Barn

£357.00 £179.40



CLEARANCE DAMAGED SECONDS - SCRATCHED, DENTED, DAMAGED OR OTHER HENCE THE PRICE

THIS IS **WHOLESALE**

**STEEL SECURITY
PERSONNEL
PEDESTRIAN
DOOR**





5 COLOURS & 3 SIZES UK STOCK AVAILABLE

- RAL 9003 WHITE
- RAL 7016 ANTHRACITE GREY
- RAL 9005 JET BLACK
- RAL 6007 JUNIPER GREEN
- RAL 5005 SIGNAL BLUE

Powder coated both in & out.

- 840mm W x 2035mm H
- 940mm W x 2035mm H
- 1040mm W x 2035mm H


SPECIFICATION SHEET

Door Frame Material	1.5mm Galvanised Steel
Door Frame Thickness	90mm
Door Leaf Material	Double skinned 0.7mm galvanised steel
Door Leaf Thickness	45mm
Clear Opening Size	1995mm H x 750mm/850mm/950mm W
U Value	1.6w/m²k (50mm Mineral Wool Insulation)
Acoustic Value	32dBa
Hinges	4 Stainless steel hinges
Weather Seal	Full weather seal to all 4 sides of the frame
Hole Cut Out Size	2035mm H x 840/940/1040mm W





4 x heavy duty hinges that offer extra security

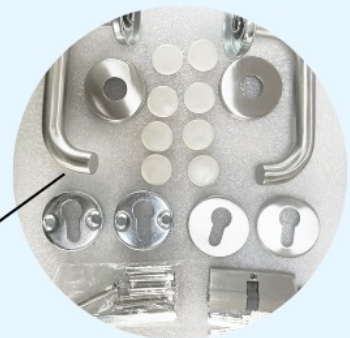

Full set of stainless steel handle & lock



3 sets of keys, single point locking mechanism



Full weather seal to all 4 sides of the frame

INSTRUCTIONS

Steel Personnel Pedestrian Door to fit 840mm x 2035mm opening

THIS IS WHOLESALE .CO.UK

4pm CUT OFF TIME.
NEXT DAY DELIVERY.
10% TRADE DISCOUNT

1




Fit door in the hole hinged in the correct orientation (NOTE door is universal, it can be fitted hinged on the left or right, just rotate 180° to so hinged on the opposite side).

2



Once door is square & firmly in position, using the pre-drilled tabs, mark fixing positions on the building lining/frame & drill using suitable drill bit.


3



Optional: if ordered the extra add on vanity trim (not cover any caps/rods, this can be fitted on the opposite side & secured with suitable adhesive /mastic.


Use anchor bolts or suitable frame fixings to secure in place (washers are advised). NOTE - due to various types of frame being installed into ie. brick, metal, timber, we are unable to supply the door with fixings.

4




The lock mechanism latch can now be rotated to suit your configuration ie. hinged left side or hinged right side using a screwdriver as shown.

5



Insert the lock mechanism cassette into the door & secure with the 2 x M5 screws as shown.

6



The lock barrel is fitted with with thumb turn from the inside / key insert to the outside. Handle & cover plate secured with screws as shown.

UNIVERSALLY HINGED LEFT OR RIGHT

Simply rotate the door 180° to hinge on the opposite side. Hinged side you can select at the point of installation depending on the orientation of the install.

BOTH IN & OUT POWDER COATING IN 5 DIFFERENT COLOURS

RAL 7016 Grey



RAL 9003 White



RAL 9005 Black



RAL 6007 Green



RAL 5005 Blue




PLEASE NOTE - THIS IS ONE STANDARD SIZED 2035mm h x 840mm / 940mm / 1040mm wide - WE WHOLESALE STANDARD DOORS AND DO NOT MAKE THEM TO ORDER CUSTOM MADE

OPTIONAL WINDOW/LOUVRE VENT

Steel security door for outdoor/exterior use - industrial-grade personnel door is the ideal Security Door for Garage, Warehouse, Shed, Industrial Unit, Shipping Container, Farm Barn - can be primed & painted any colour yourself) complete with outer frame, & optional stainless steel door handle & lock with internal thumb turn & 3 sets of keys, single point locking mechanism). OPTIONAL POWDER COATED COLOURS (AT EXTRA COST)

- RAL 9003 WHITE (painted both sides in/out)
- RAL 7016 ANTHRACITE GREY (painted both sides in/out)
- RAL 9005 JET BLACK (painted both sides in/out)
- RAL 6007 JUNIPER GREEN (painted both sides in/out)

Weight: 840mm 46kg / 940mm 49kg / 1040mm 52kg

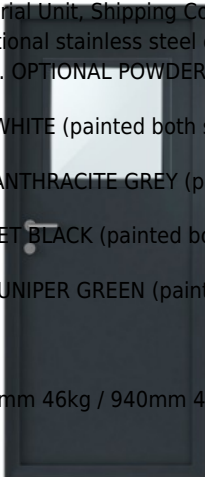

[DOWNLOAD PDF TECHNICAL DRAWING / DIMENSIONS](#)

[DOWNLOAD INSTALLATION INSTRUCTIONS / MANUAL](#)

Square Vision Panel Window

Double glass 400*400mm

Linear Vision Panel Window

Double glass 220*1500mm

Louvre Vent

500*300mm

840mm / 940mm x 1040mm x 2035mm outer dimensions ie. to fit 840mm x 2035mm cut out (clear opening 750mm/850mm/950mm) - door frame thickness 90mm / door leaf thickness 45mm. Actual Door Size: 1943mm x 750mm/850mm/950mm - comes hung in frame and fixing points located around the frame for easy install with the correct screws/fixings (not supplied) into brick, timber, steel or other building material. We recommend adding 5-10mm to the external size about for fitting which can be filled with foam / silicone.

Comes with vanity flush fit trim outer frame 1 side only pre-fitted - overall size 905mm/1005mm/1105mm x 2090mm.

Optional add on from the drop down 1 x removable vanity cover surround trim to cover/hide any gaps/joins on the other side of the door.

WE STOCK ALL: CONFIGURATIONS OF DOOR OPENING INWARDS OR OUTWARDS, AS VIEWED FROM OUTSIDE- Doors can be fitted with hinges either on the left or the right hand as viewed from outside by rotating the pre-latch mechanism,- SEE IMAGE FOR FURTHER DETAILS ON CONFIGURATIONS WHEN SELECTING YOUR VARIATION OF DOOR AS INCORRECT ORDERS/RETURNS MUST BE RETURNED AT BUYERS COST. IF IN DOUBT PLEASE ASK.

Door Frame Material	1.5mm Galvanised Steel
Door Frame Thickness	90mm
Door Leaf Material	Double skinned 0.7mm galvanised steel
Door Leaf Thickness	45mm
Door Leaf Core	Honeycomb core
Actual Door Size	1943mm x 750mm/850mm/950mm
U Value	1.6w/m2k (50mm Mineral Wool Insulation)
Acoustic Value	32dBa
Hinges	4 Stainless steel hinges

NOTE: due to manufacturing tolerances with regards to batch variation, we recommend ordering all coloured/powder coated doors for a project at the same time, from the same batch as we cannot be held responsible for any variation that occurs between batches.

Must be installed by a competent persons, we are not able to train, teach any DIY enthusiast how to fit a door correctly. Whilst its not a difficult job, each individuals competency and skill set varies and thus professional knowledge is advised to fit this product correctly, safely and securely for normal operation.

Note - door includes mechanical / moving parts such as lock mechanism, hinges, latches and as such requires regular maintenance and upkeep ion the form of regular lubrication/oil applying.